


PRECISION 4-TERMINAL RESISTORS, 2- TO 20-WATT CERAMIC ENCASED LVF & LVH SERIES



Term.W is
RoHS
compliant
& 260°C
compatible

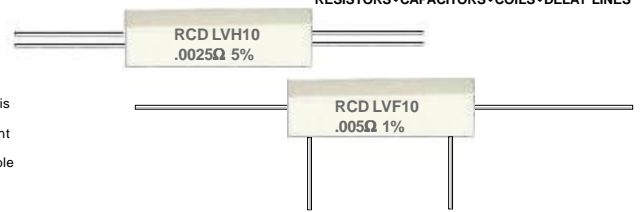


FEATURES:

- Industry's widest range of 4-terminal power resistors!
- Standard tolerances to 0.1%, TC's to 5ppm
- Welded & fireproof construction
- Available on exclusive **SWIFT™** delivery program!
- 4-terminal "Kelvin" design eliminates contributing error due to lead resistance
- Standard current ratings to 40A (up to 100A on custom basis)
- For surface mount design up to 3W see SF series

OPTIONS:

- Option X: Non-inductive design
- Option E: Low thermal EMF design
- Numerous other options available including custom marking, lead forming, lead diameter, burn-in, etc.

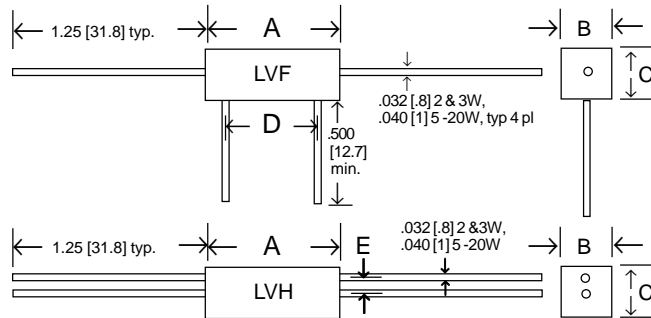


Four-Terminal Current Sensing as low as 0.0005Ω

RCD's Series LVF resistors feature a 4-terminal "Kelvin" design to eliminate the effects of lead resistance. Precision resistive element is potted inside a ceramic case for excellent durability and environmental protection. Series LVF resistors are well-suited for current sensing applications including test instrumentation, power supplies, and power amplifiers. Specify option E when circuits require low thermal EMF.

TEMPERATURE COEFFICIENT

Resis. Range	Standard TC (ppm/°C, typ)	Optional TC
.0005 to .0049Ω	600 ppm	200, 100, 50
.005 to .0249Ω	200 ppm	100, 50, 30
.025 to .99Ω	100 ppm	50, 30, 20
1 to 9.9Ω	50 ppm	30, 20, 10
10Ω and up	30 ppm	20, 10, 5


DERATING:

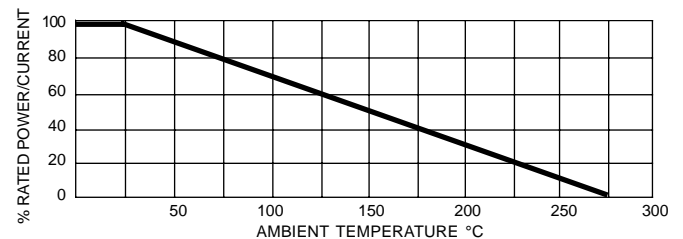


RCD Type	Wattage Rating ¹	Max. Working Voltage ^{1,2}	Max. Current ^{1,3}	Resistance Range (Ω)	DIMENSIONS [Numbers in brackets are mm]				
					A ±.04 [1.0]	B ±.032 [.81]	C ±.032 [.8]	D (LVF only) ±.12 [3]	E (LVH only) ±.032 [.8]
LVF2S, LVH2S	2	100V	15A	.0005 - 10K	.59 [15]	.25 [6.35]	.25 [6.35]	.45 [11.43]	.075 [1.9]
LVF2, LVH2	2	100V	20A	.0005 - 15K	.70 [17.58]	.27 [6.8]	.27 [6.8]	.50 [12.7]	.075 [1.9]
LVF3, LVH3	3	150V	25A	.001 - 25K	.88 [22.4]	.31 [7.9]	.31 [7.9]	.56 [14.2]	.10 [2.54]
LVF5, LVH5	5	200V	30A	.001 - 30K	.88 [22.4]	.38 [9.7]	.35 [8.9]	.56 [14.2]	.10 [2.54]
LVF7, LVH7	7	350V	35A	.001 - 50K	1.42 [36] Max	.38 [9.7]	.35 [8.9]	1.00 [25.4]	.10 [2.54]
LVF10, LVH10	10	500V	40A	.001 - 100K	1.96 [50] Max	.38 [9.7]	.38 [9.7]	1.38 [35.0]	.10 [2.54]
LVF15, LVH15	15	540V	40A	.001 - 100K	1.96 [50] Max	.50 [12.7]	.50 [12.7]	1.38 [35.0]	.125 [3.17]
LV20F, LVH20	20	600V	40A	.002 - 200K	2.55 [65] Max	.50 [12.7]	.50 [12.7]	2.00 [50.8]	.125 [3.17]

¹ Consult factory for increased ratings ² Working Voltage = (PR)^{1/2}, voltage not to exceed the maximum value listed ³ Units not to exceed wattage, current, or voltage rating, whichever is less

P/N DESIGNATION:

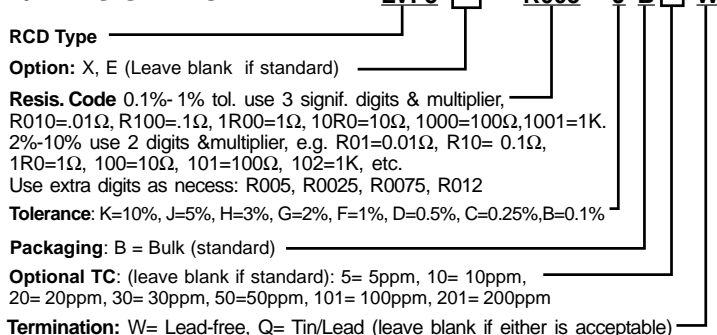

SUGGESTED MOUNTING

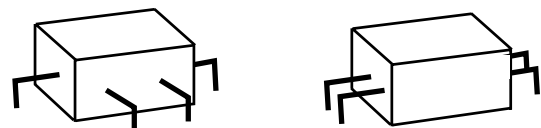

Bend leads approximately 1/8" from body. If operating at or near rated power, standoffs are suggested to prevent overheating of the PCB. Utilize heavy duty copper traces adequate for intended current levels.