


FLAT RADIAL LEAD INDUCTOR COILS

FRL SERIES




- Narrow size for densely populated boards
- Low cost
- High Q, high current
- 0.82μH to 10mH

OPTIONS

- Option ER: Military Screening: per MIL-C-15305 (Thermal Shock -25/+85°, DCR, Inductance, Vis/Mech Insp)
- Option A: units marked with inductance value
- Option 55: 1KHz Test Frequency
- Non-standard values, increased current, increased temp.
- Encapsulated version



RCD's FRL Series is an economical inductor with a space-saving flat coil design. The unique characteristics of the rectangular geometry enable a wide range of inductance and high Q levels for use at high frequencies. Construction is open-frame wirewound utilizing a ferrite core.

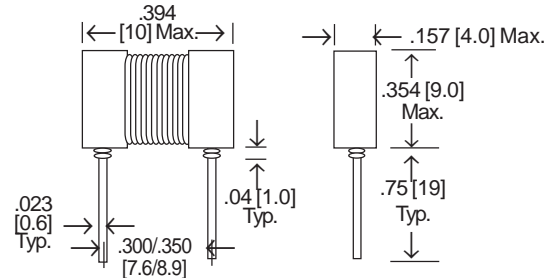

Inductance Value (μH)	Test Frequency (MHz)	Q (Min.)	DCR Max. (Ω)	Rated DC Current (Amp)
0.82	25	37	.010	7.4
1.0	7.9	40	.011	7.0
1.2	7.9	39	.012	6.0
1.5	7.9	33	.014	5.0
1.8	7.9	37	.020	4.8
2.2	7.9	38	.025	4.4
2.5	7.9	40	.030	4.1
2.7	7.9	43	.028	4.0
3.3	7.9	35	.036	3.7
3.9	7.9	37	.048	3.4
4.7	7.9	37	.053	3.2
5.0	7.9	40	.080	2.9
5.6	7.9	35	.092	2.8
6.8	7.9	29	.113	2.6
7.5	7.9	30	.114	2.5
8.2	7.9	32	.116	2.2
10	7.9	40	.160	2.1
12	2.5	40	.140	2.0
15	2.5	40	.158	1.6
18	2.5	40	.180	1.5
22	2.5	40	.230	1.4
27	2.5	50	.285	1.3
33	2.5	45	.346	1.2
39	2.5	45	.371	1.1
47	2.5	45	.502	1.0
56	2.5	40	.687	.95
68	2.5	40	.888	.90
75	2.5	40	1.19	.86
82	2.5	50	1.20	.85

Inductance Value (μH)	Test Frequency (MHz)	Q (Min.)	DCR Max. (Ω)	Rated DC Current (Amp)
100	2.5	60	1.60	.75
120	.79	70	1.72	.65
150	.79	60	1.95	.60
180	.79	70	2.07	.58
220	.79	50	2.18	.49
250	.79	40	2.70	.49
270	.79	50	2.53	.45
330	.79	50	3.33	.41
390	.79	45	3.45	.39
470	.79	40	5.20	.35
500	.79	35	5.30	.34
560	.79	40	5.40	.32
680	.79	45	5.90	.29
750	.79	30	6.00	.28
820	.79	40	6.32	.27
1000	.79	40	8.60	.22
1200	.25	70	10.0	.21
1500	.25	62	14.3	.19
1800	.25	62	15.8	.17
2200	.25	60	17.7	.15
2500	.25	60	18.0	.14
2700	.25	60	19.3	.14
3300	.25	50	21.7	.13
3900	.25	50	26.0	.12
4700	.25	50	29.9	.11
5000	.25	45	31.0	.10
6000	.25	35	41.0	.09
7500	.25	25	50.0	.08
10000	.25	25	70.0	.07

SPECIFICATIONS

Tolerance: ±10% standard (±5% and ±20% available)
 Temperature Range: -40 to +105° C
 Temperature Rise: 20° C typ. at full rated current

APPLICATIONS: Typical applications include noise filtering, DC/DC converters, switching regulators, audio equipment, telecom, RF circuits, audio filters, hash filters, power supplies, power amplifiers, etc. Customized models available for specific applications (consult factory).

P/N DESIGNATION:

